

Thank you for purchasing this AUTEL tool. Manufactured to a high standard, our tool will, if used according to these instructions and properly maintained, give you years of trouble-free performance.

## Getting Started



**IMPORTANT:** Before operating this unit, please read these instructions and the user manual carefully and pay extra attention to the safety warnings and precautions. Please use this unit as instructed. Failure to do so may cause damage and/or personal injury and will void the product warranty.



**NOTE:** The operation steps for these three tools are the same. The images and illustrations depicted in this quick guide may differ slightly from the actual ones. The user interfaces for iOS & Android devices might be slightly different. The screenshots in this quick guide are captured from the iOS device app.


1



### Download & install app

- Scan the QR code or search for **MaxiAP200** in App Store or Google Play to download and install the app to your device.


2



### Register & log in

- Open the MaxiAP200 app and tap **Register** near the top right of the screen.
- Follow the on-screen instructions to complete the registration.
- Log in with your registered email address and password.


3



### Bind VCI with device

On the **Bind VCI** interface, scan the QR code imprinted on the Bluetooth dongle to automatically retrieve the serial number. Ensure the email information is correct. Tap **Bind** to pair dongle with device.


4



### Purchase & install software

Tap **Mail** below the list to purchase and install the software selected. Full OBDII functions included at no charge. One vehicle-line/maintenance service is included free through **Mail** after successfully pairing the dongle for the first time (For iOS devices, the purchased software will display in the list).

5

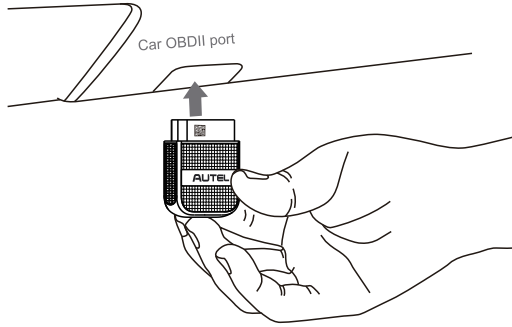


#### Find OBDII Port

Plug the connector of the Bluetooth dongle into the vehicle's OBDII port.

- The vehicle's OBDII port is generally located under the vehicle dashboard (Consult vehicle user manual for specific location).

6

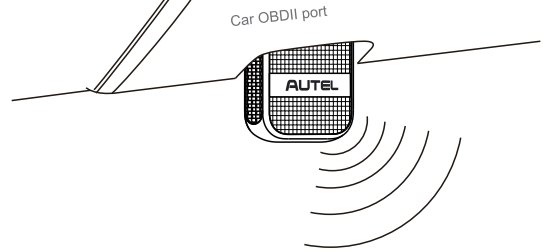


#### Key On, Engine Off

Turn the vehicle ignition to Key On, Engine Off position.

- The LED on the dongle will light solid green when connected.

7

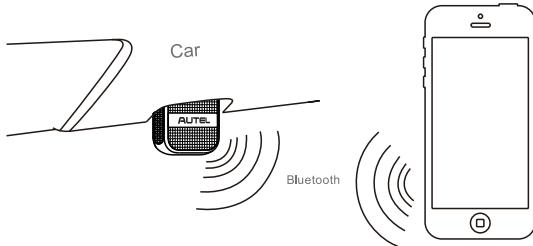


#### VCI Connection

For Android devices, tap **Me > VCI Connection** or the **VCI** button near the top right of the Home screen. For iOS devices, tap **Setting > Bluetooth** on your iOS device to open the Bluetooth function. Then tap the Bluetooth name on the screen to pair it with the device. The Bluetooth name starts with AP, followed by the serial number of the dongle.

- Ensure your device's Bluetooth is turned on.
- When the device is successfully paired with the dongle, the LED on the tool will light solid blue.

8



#### Finish Installation

- Your MaxiAP AP200C/AP200H/AP200M dongle is now ready for use.

## UPDATE

**Software:** The installed diagnostic/service software can be downloaded through Mall. When a new version is available, an **Update** button will display. Tap the button to update the software.

**VCI Firmware:** Tap **Me > VCI Manager > Detect Firmware** to update the firmware if a new version is available.

## PRINT

1. For iOS devices, the saved report can be printed via the Print function on the device.
2. For Android devices, download and install a third-party Print app to print the saved report.

**NOTE:** The device needs to be connected with a printer to print.

For service and support, please contact us.

<http://pro.autel.com> / [www.autel.com](http://www.autel.com) / [support@autel.com](mailto:support@autel.com)  
 0086-755-2267-2493 (China HQ) / 1-855-AUTEL-US (288-3587) (North America)  
 0049 (0) 6103-2000520 (Europe) / +045 5948465 (APAC) / +971 43682500 (IMEA)

© Autel Intelligent Technology Corp., Ltd. All Rights Reserved.

**OBD2GATE**  
.com